

ARCHITECTURALLED LED Emergency Light


Product Specifications

Features :

Model	LI-7036
Description	<p>Wall Mounted LED Emergency Light</p> <p>3.2W</p> <p>UK-94V-0 Flame rating - Fire-retarded</p> <p>Injection Molded thermoplastic ABS Housing</p> <p>Nickel Cadmium Battery - 3.6V 1000mah</p> <p>Test Button and charge Indicator Light</p> <p>Emergency Heads can be rotated to cover more than 80 sq meters</p>
Dimensions	9.45" L x 4.5" H x 2.12" Ext
Conversion Time	<0.2second
Backup Time	=90 minutes
Input Voltage	120/277VAC 50/60Hz
Suitable	Interior
Rated Life	50000 hours
Certification	UL
	IP20
Operating Temperature	0° C - 40° C



LI-7036

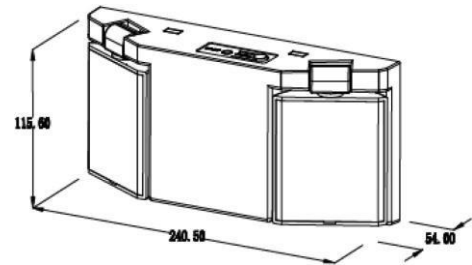

Ordering Information: Use our Ordering format-- Use our squares if you can

Example: LI-7036

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series	Size	Source	Wattage	Voltage	CCT	Finish
LI-7036		LED=LED	3.2=3.2W 35=35W	120=120V 277=277V		

*Consult Factory regarding availability.