

TECHNICAL INFORMATION

FEATURES & SPECIFICATIONS

The pole shaft is fabricated from hot rolled carbon steel having a minimum yield of 45,000 PSI and conforms to ASTM A500 grade C requirements. The shaft construction is a single piece of formed steel welded longitudinally. The handhole is located 1' 6" above the pole base. A ground lug is provided standard.

Anchor Base


The anchor base is fabricated from a structural quality hot rolled carbon steel plate that has a minimum yield strength of 36,000 PSI. The anchor base telescopes the pole shaft and has a circumferential weld on the top and bottom.

Base Cover





A full base cover is provided which encapsulates the base plate and anchor bolts to provide a clean transition from pier to pole.

Finish

The poles is finished with a Super Durable Powder coat Paint.

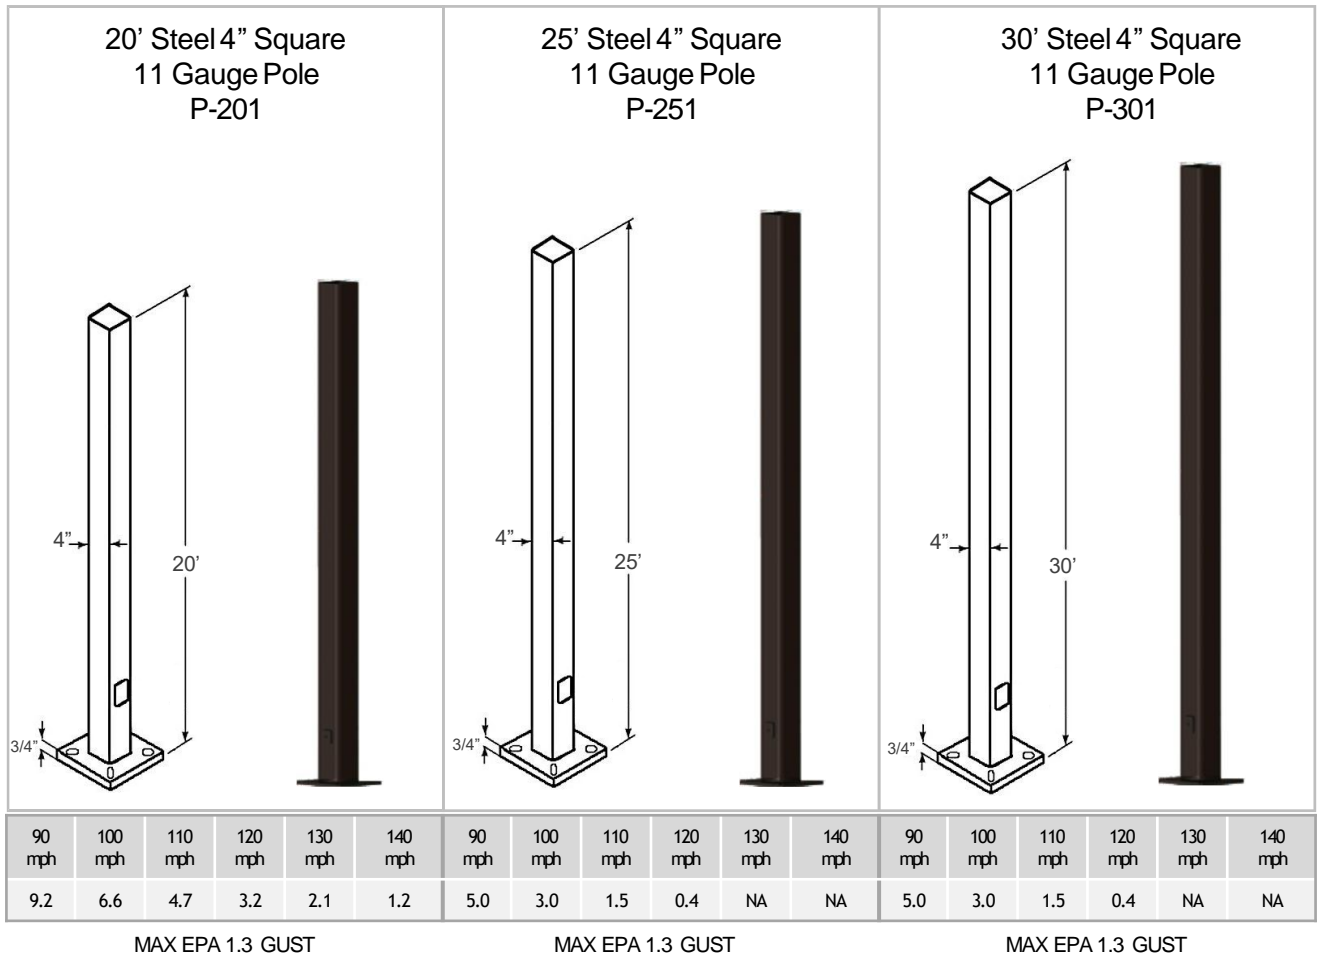

POLE ACCESSORIES



Item#	Description	Dimensions	Bolt Circle	Weight (lbs)	Units/ Carton
P-TN01	4" Single Square Vertical Tenon	4"	12	2.7	12
Item#	Description	Dimensions	Bolt Circle	Weight (lbs)	Units/ Carton
P-TN02	4" 180° Twin Square Horizontal Tenon	4"	4	2.7	4
Item#	Description	Dimensions	Bolt Circle	Weight (lbs)	Units/ Carton
P-TN02-90	4" 90° Twin Square Horizontal Tenon	4"	4	2.7	4
Item#	Description	Dimensions	Bolt Circle	Weight (lbs)	Units/ Carton
P-TN03	4" 90° Triple Square Horizontal Tenon	4"	4	2.8	4
Item#	Description	Dimensions	Bolt Circle	Weight (lbs)	Units/ Carton
P-TN04	4" 90° Quad Square Horizontal Tenon	4"	4	3.2	4
Item#	Description	Dimensions	Bolt Circle	Weight (lbs)	Units/ Carton
P-WB01	Wall Mount 90° Bracket	6" x 8" x 4"	6	1.85	6
Item#	Description	Dimensions	Bolt Circle	Weight (lbs)	Units/ Carton
P-WB02	Wall Mount Bracket	3 4/5" x 4"	15	1.4	15

