

DESCRIPTION

MATERIAL

Aluminum Die Casting.
Salt mist resistance & anti aging.
High thermal conductivity.

REFLECTOR - DIFFUSER

UV & Fire resistant high out put PC lenses.

LED TYPE

Phillips Lummi LED'S.

Electrical



100-277V Driver included

LED EFFICIENCY

130 lm/W

IP RATING


IP65

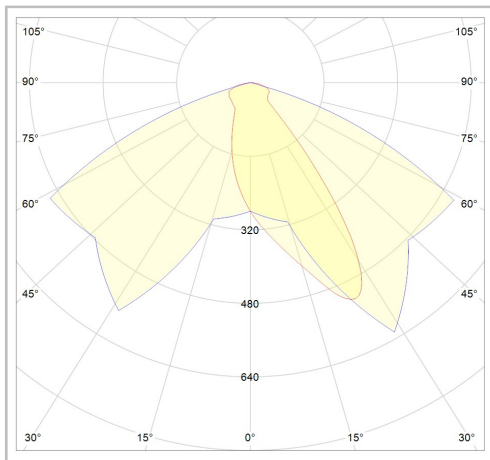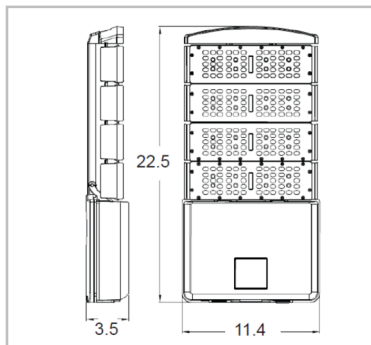







--	--	--	--	--	--	--	--

ORDERING INFORMATION

Model	Watts	Lumen	Optic	Color Temp.	CRI	Optional	Finish color
LI-PLYR298-W200	200	24000	A = Type 3 (Asymmetric)	0 = 4000K 1 = 5000K	80	1 = Dimmable 2 = Occupancy Sensor 3 = Photocell	BR

Ordering Example:

LI-PLYR298-W200-200-A-1-1-BR

Project name:

AURA

FIXTURE MOUNTING OPTIONS

M1 = Straight Arm Mount



M2 = Slip Fitter



M3 = U-Bracket Trunnion



Ordering Example:
LI-PLYR298-W200-200-A-1-1-BR-M1