

DESCRIPTION

MATERIAL

Aluminum Die Casting.
Salt mist resistance & anti aging.
High thermal conductivity.

REFLECTOR - DIFFUSER

UV & Fire resistant high out put PC lenses.

LED TYPE

Phillips Lummi LED'S.

Electrical



100-277V Driver included

LED EFFICIENCY

130 lm/W

IP RATING

IP65

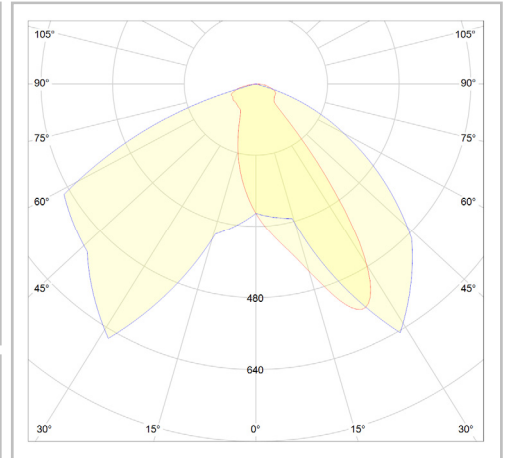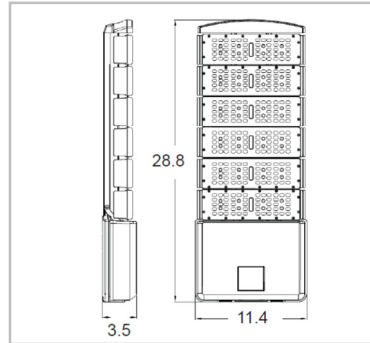

ORDERING INFORMATION

| Model | Watts | Lumen | Optic | Color Temp. | CRI | Optional | Finish color |
|-----------------|-------|-------|----------------------------|------------------------|-----|---|--------------|
| LI-PLYR298-W300 | 300 | 35000 | A = Type 3 (Asymmetric) | 0 = 4000K 1 = 5000K | 80 | 1 = Dimmable 2 = Occupancy Sensor 3 = Photocell | BR |

Ordering Example:

LI-PLYR298-W300-300-A-1-1-BR

Project name:

AURA

FIXTURE MOUNTING OPTIONS

M1 = Straight Arm
Mount



M2 = Slip Fitter



M3 = U-Bracket
Trunnion



Ordering Example:
LI-PLYR298-W300-300-A-1-1-BR-M1