



AURA

DESCRIPTION

AURA 4th generation series is the most economical outdoor luminaire suitable for parking lot lighting, and street lighting. Individual engines with aluminum heatsinks provide easy thermal management.



ORDERING INFORMATION							
Model	Watts	Lumen	Optic	Color Temp.	CRI	Optional	Finish color
LI-PLQ2000W	200	24000	A = Type 3 (Asymmetric)	0 = 4000K 1 = 5000K	80	1 = Dimmable 2 = Occupancy Sensor 3 = Photocell	BR


Ordering Example:

LI-PLQ200W

Project name:

AURA

- **Material:** Aluminum Die Casting. Salt mist resistance & anti aging. High thermal conductivity.
- **LED Type:** Phillips Lummi LED'S LUXEON 3030 2D.
- **Electrical:** 120~ 277Vac, 50/60Hz Driver included.
- **Power Factor:** ≥95%
- **LED Efficiency:** 130 lm/W
- **Color Temperature:** 4000K, 5000K
- **Operation Temperature:** -35°C to 55°C
- **Color Rendering Index (CRI):** ≥ 75
- **THD%:** 16.3-17.9
- **IP Rating:** IP65

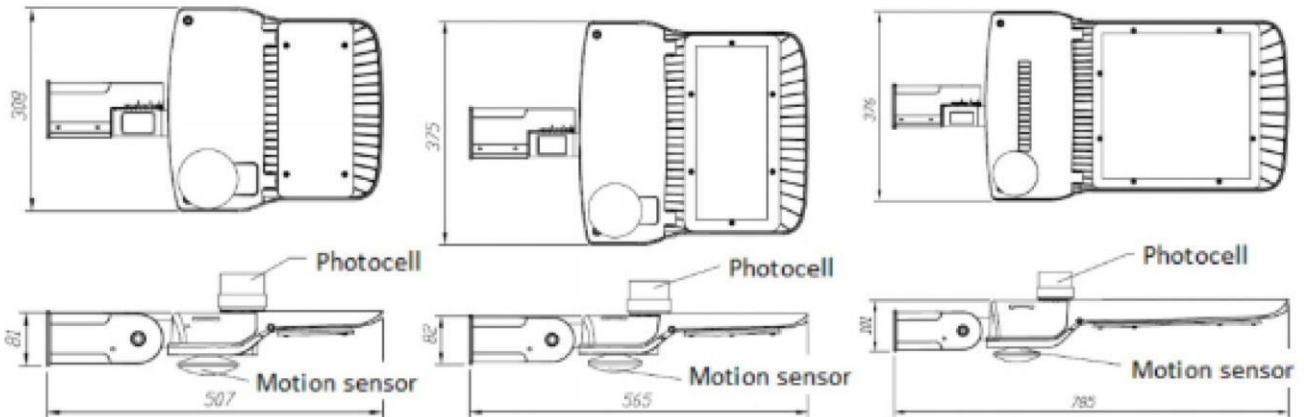

AURA

FIXTURE MOUNTING OPTIONS		
M1 = Straight Arm Mount		
M2 = Slip Fitter		
M3 = U-Bracket Trunnion		

: Ordering Example
LI-PLQ200W