



AURA

DESCRIPTION

AURA 4th generation series is the most economical outdoor luminaire suitable for parking lot lighting, and street lighting. Individual engines with aluminum heatsinks provide easy thermal management.



--	--	--	--	--	--	--	--


ORDERING INFORMATION							
Model	Watts	Lumen	Optic	Color Temp.	CRI	Optional	Finish color
LI-PLQ300W	300	35000	A = Type 3 (Asymmetric)	0 = 4000K 1 = 5000K	80	1 = Dimmable 2 = Occupancy Sensor 3 = Photocell	BR

Ordering Example:
LIPLQ300W

Project name:

AURA

- **Material:** Aluminum Die Casting. Salt mist resistance & anti aging. High thermal conductivity.
- **LED Type:** Phillips Lummi LED'S LUXEON 3030 2D.
- **Electrical:** 120~ 277Vac, 50/60Hz Driver included.
- **Power Factor:** ≥95%
- **LED Efficiency:** 130 lm/W
- **Color Temperature:** 4000K, 5000K
- **Operation Temperature:** -35°C to 55°C
- **Color Rendering Index (CRI):** ≥ 75
- **THD%:** 16.3-17.9
- **IP Rating:** IP65

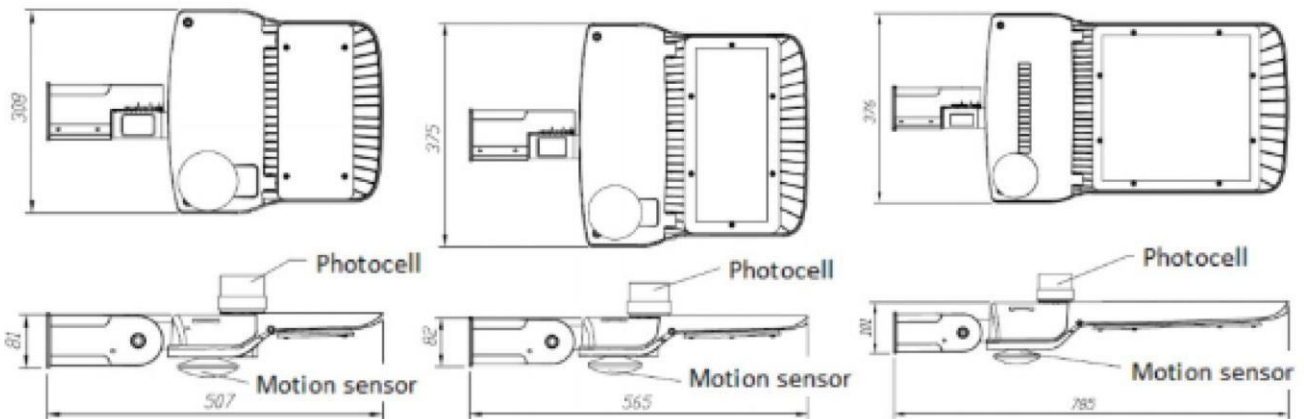

AURA

FIXTURE MOUNTING OPTIONS		
M1 = Straight Arm Mount		
M2 = Slip Fitter		
M3 = U-Bracket Trunnion		

: Ordering Example
LI-PLQ300W