

LED PANELS


Our *LED panels* provide totally uniform, smooth and visually comfortable lighting with low glare and shadows that invigorate otherwise uninspired areas with crisp light.

Features:

- Mercury free
- 3 Years warranty
- Fits standard 1" and 9/16" T-bar grid ceilings.
- Ideal for: Offices, Retail Stores, Schools, Hospitality, Restaurants, Healthcare



Specifications:

- Input Voltage: PoE Compatible
- Wattage (W):
 - 1x4 = 15W
 - 2x2 = 25W
 - 2x4 = 25W, 50W
- Lumens (L):
 - 1x4 = 2100 lm
 - 2x2 = 3500 lm
 - 2x4 = 3500 lm, 6500 lm
- Rated Life 50,000 hours
- CRI >80
- Damp location rated, IP20
- Controls 0-10V dimming with PoE driver

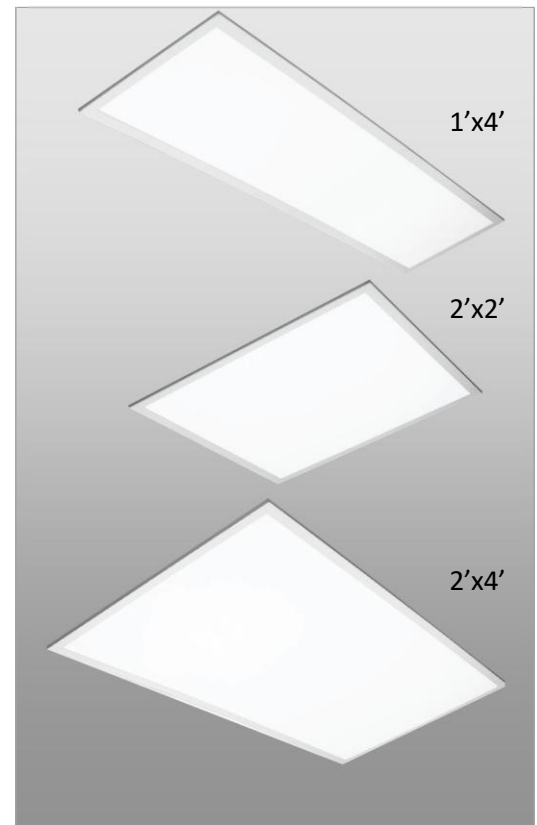


LED PANELS

Our *LED panels* provide totally uniform, smooth and visually comfortable lighting with low glare and shadows that invigorate otherwise uninspired areas with crisp light.

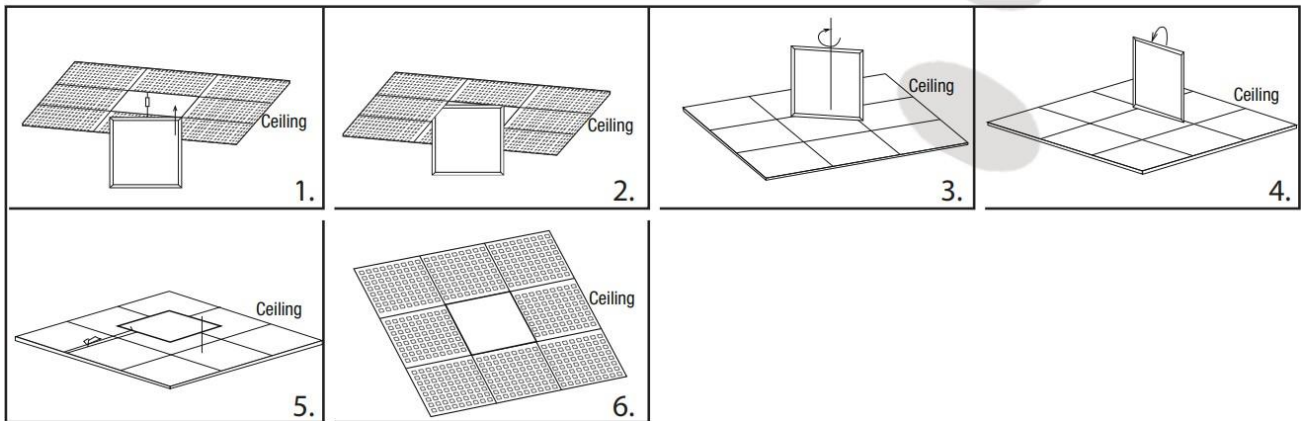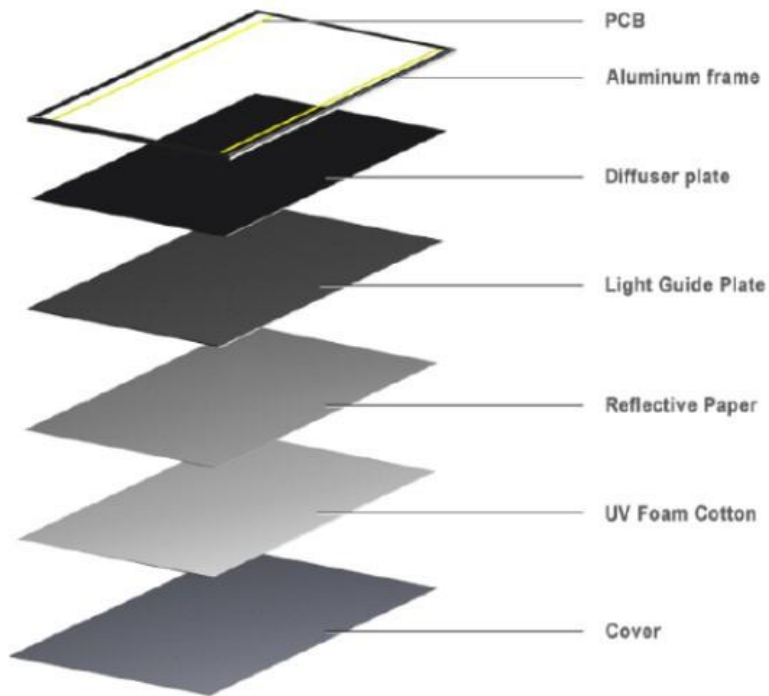


LED PANELS

Polar Graph:

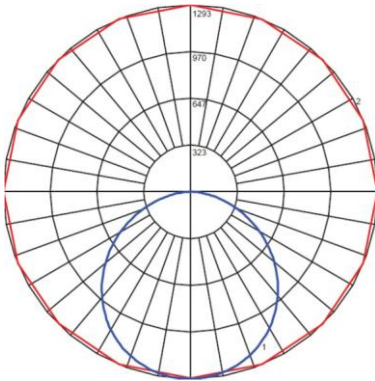


2x2

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4412	4513	4581
55	4251	4376	4450
65	3986	4136	4196
75	3419	3623	3671
85	2294	2610	2618

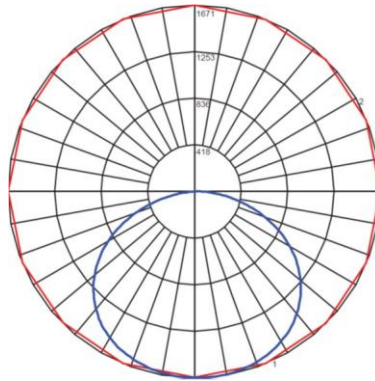


2x4

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	6675	6374	5773
55	6442	6200	5563
65	6001	5775	5155
75	5091	4888	4329
85	3113	3077	2764

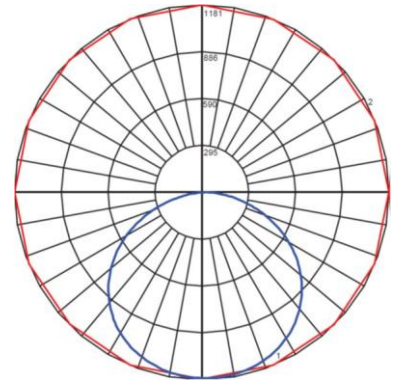

1x4

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4527	4319	3862
55	4346	4165	3702
65	3992	3813	3434
75	3284	3098	2942
85	1765	1634	2081

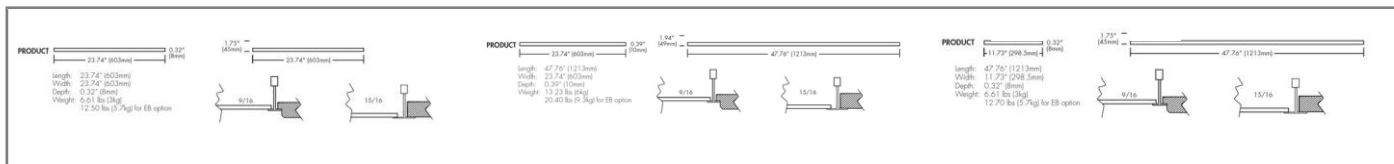

Ordering Example:

LI-POE-CFP22-WH-25-1-WH

ORDERING INFORMATION

Model	Watts	Lumen	Color Temp.	CRI	PoE Dimmable	Finish	Optional
LI-CFP22-WH	25	3500	1 = 3000K 2 = 4000K 3 = 5000K	>80	Yes	WH	Surface mount kit
LI-CFP24-WH	25, 50	3500, 6500					
LI-CFP14-WH	15	2100					

Project Notes: