

RANKI SERIES



RANKI RECESSED DOWNLIGHTS

RANKI is a modern, sleek, efficient indoor lighting solution with convenient installation and versatility. It is designed to provide even and soft illumination, glare free.


Shape (Baffle Size)



Round
2"



Round
2.5"



Round
3.0"



Square
2.5"



Square
3.0"

Mountings



Recessed
Trim




Recessed
Trimless




Millwork

Light distributions



Fixed



Adjustable



LI-LEA-13

2"
Fixed

2"
Adjustable



LI-LEA-14

2.5"
Fixed

2.5"
Adjustable

Round

Cone baffle

Trim A



Trim B



Trimless



Mill work



Pinhole baffle

Trim A



Trim B



Trimless



Millwork



Square

Cone baffle

Trim A



Trim B



Trimless



Millwork



Pinhole baffle

Trim A



Trim B



Trimless



Millwork





LI-LEA-15
3.0"
Fixed



LI-ACOT-84-AM
3.0"
Adjustable

Round

Cone baffle

Trim A



Trim B



Trimless



Millwork



Pinhole baffle

Trim A



Trim B



Trimless



Millwork



Square

Cone baffle

Trim A



Trim B



Trimless



Millwork



Pinhole baffle

Trim A



Trim B



Trimless



Millwork





Cone baffle

It is a multifunctional accent light that can highlight a single object or architectural element.

Available in fixed and adjustable versions, while the adjustable version can be precisely set to tilt at an angle of up to 30 degrees, so the light will be emitted exactly where you want it.

There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.







Pinhole baffle

It is a multifunctional accent light that can highlight a single object or architectural element. To further reduce the visual impact on the ceiling, the pin hole baffle is used to bring the luminaire flush with the ceiling for added glare protection and a 40 degree cut-off angle.

Fixed and adjustable functions are available, while the adjustable version can be precisely set to a tilt angle of up to 30 degrees, so the light will be emitted exactly where you want it.

There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.

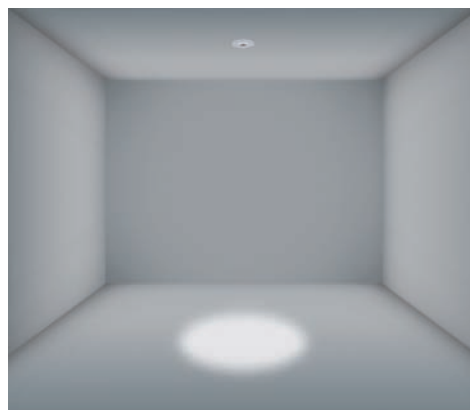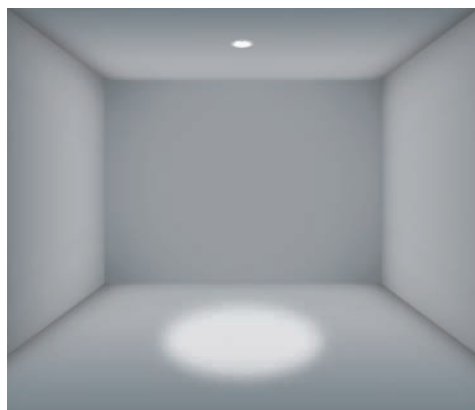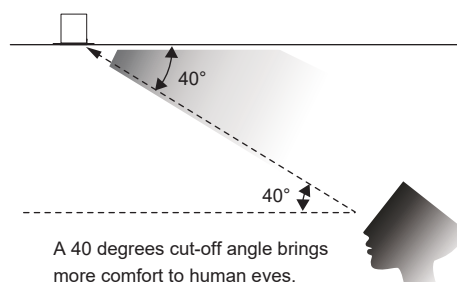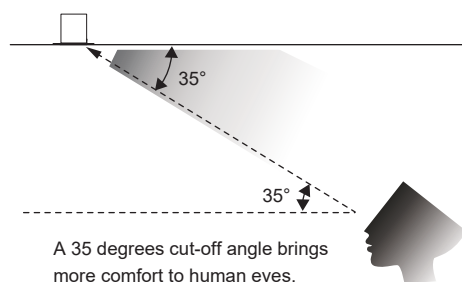





RANKI-65



2"

Round


Fixed

Adjustable


RANKI-A-65C-RTF



Article number	LI-2318.157-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver


RANKI-B-65C-RTF



Article number	LI-2318.116-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



⌀ Cut out : 2 12/32" (60mm)

Accessories



ACHO-6
Honeycomb louver


RANKI-B-65C-RTL



Article number	LI-2318.210F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



⌀ Cut out : 2 12/32" (60mm)

Accessories



ACHO-6
Honeycomb louver




ACOT-107
Suction cup

RANKI-A-65C-RTA




Article number LI-2318.159-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable

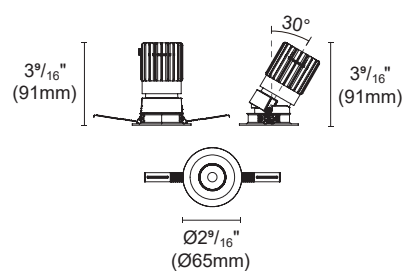

⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver

RANKI-B-65C-RTA




Article number LI-2318.117-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver

RANKI-B-65C-RTLA




Article number LI-2318.211F-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable

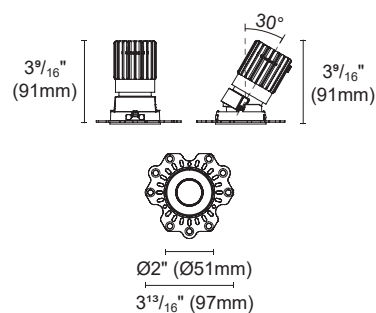

⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver

RANKI-A-65P-RTF




Article number LI-2318.158-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver

RANKI-B-65-RTF




Article number LI-2318.120-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver

RANKI-B-65-RTLF




Article number LI-2318.212F-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



⌀ Cut out : 2 12/32" (60mm)

Accessories



ACHO-6
Honeycomb louver

RANKI-A-65P-RTA



RANKI-B-65-RTA



RANKI-B-65-RTLA



Article number LI-2318.160-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



Article number LI-2318.121-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable




Article number LI-2318.213F-LEA-13

Fixture Consumption	12W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable

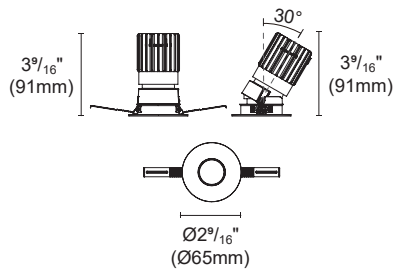


⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver

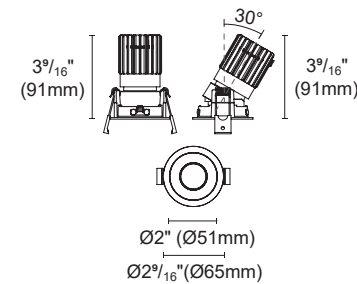


⌀ Cut out : 2 12/32" (60mm)

Accessories




ACHO-6
Honeycomb louver

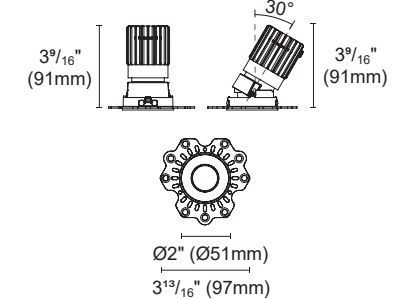

⌀ Cut out : 2 12/32" (60mm)

Accessories



ACHO-6
Honeycomb louver