

## LED TROFFER SERIES



### Product Description:

Specific design innovative ultra-thin LED troffer Light is a design based on the ideal replacement of fluorescent troffer.

The IM-TR22/24 accepts 120-277VAC, and have a high lumen efficiency up to 125- 130Lm/W.

With well-distributed soft light, no any dark spot and special ultra-thin design.

This Luminaries is regarded as the leading of greening Lighting for commercial and industrial uses.

### FEATURES:

- Durable 22 GA. cold roller steel housing provides strength and uniformity.
- Ultra-thin 1.77" (45mm) luminaire lightweight design for easy installations.
- Luminaires sides and ends are hemmed for safe, easy handling.
- Sealed lens to prevent ingress of insects.
- Unique luminaire design create perfect balance of both horizontal and vertical illumination.
- Optimized PC lens eliminates pixilation and delivers a low-glare ,diffused light distribution.
- ETL&DLC Premium Listed.
- Suitable for damp locations.
- Designed for indoor use.
- RoHS compliant. Consult factory for additional details.
- Meets FCC Part 15,subpart B Class A standers for conducted and radiated emissions.

### Specification:

#### Housing:

Durable 22 ga.cold roller steel housing provides strength and uniformity.

#### Mounting:

Ceiling Recessed mount.

#### Lens:

Unique design create perfect balance of both horizontal and vertical illumination.

#### Finish:

Powder coat finish.

### Electrical:

**Input Voltage:** 100V – 277V

**Color Temperature:** 4000K

**CRI:** ≥ 80

**Lifetime:** 50,000 hours

### LED Driver:

100V - 277V 50/60 Hz constant current dimmable driver provides high efficiency operation

If dimming not requires the fixture can be operated from a standard wall switch

### Certificate:


DLC, ETL, RoHS.

### Warranty:


Five-years limited warranty.

## LED TROFFER SERIES

### DIMENSION:

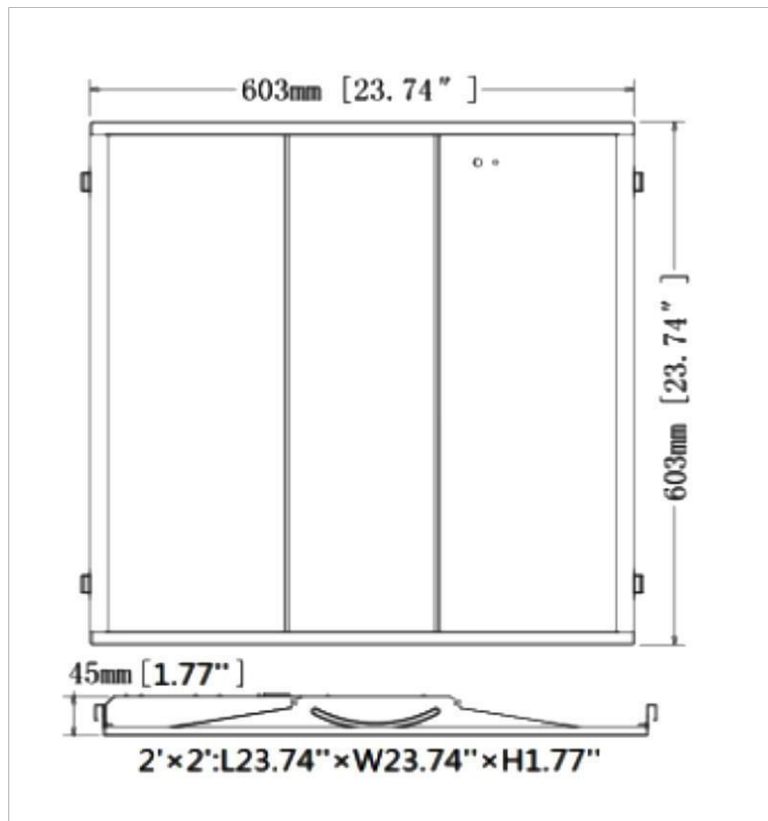

### PHOTOMETRICS:

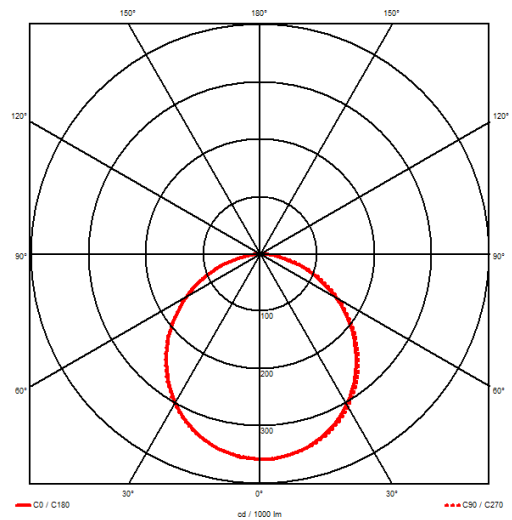

Ordering Example:LI-TR22-WH-A



Series	Power / lm	Voltage	Color Temp.	Distribution	Controls	Finish
LI-TR22	40 = 40W /5200 lm	100V – 277V	1 = 4000K	General distribution	0-10V Dim.	White