

SLIM LED LIGHT

DESCRIPTION

Slim LED Panel Light was designed as a slim LED light for new construction and remodel applications. It is offered in 2 size in 4" and 6", in square with a white finish. The product was engineered to have a smooth lumen distribution ranging from a clean 800 to a powerful 1200 lumens all Damp & Wet Location listed. The item can be specified in either 3000K, 4000K or 5000K special design for project used.



Features:

- Latest led lighting technology offers the highest return on initial investment.
- Perfect light uniformity, up to 80LM/W.
- Triac dimmable driver.
- Limited 5-year warranty.
- Energy-saving lamps and lanterns, high lumen, perfect color temperature
- and high CRI characteristics.

LED Driver:

120V 50/60 Hz constant current dimmable driver provides high efficiency operation
If dimming is not required the fixture can be operated from a standard wall switch

Specification:

MATERIAL:

Die casting Al. frame + PC backside + PMMA LGP+PC diffuser

DIMMING: 100%-10% (Triac Dimming)



Warranty: Five-years limited warranty

Certificate :

ETL, Energy Star, T24, FCC/IC.

SLIM LED LIGHT

DIMENSIONS & PHOTOMETRICS:

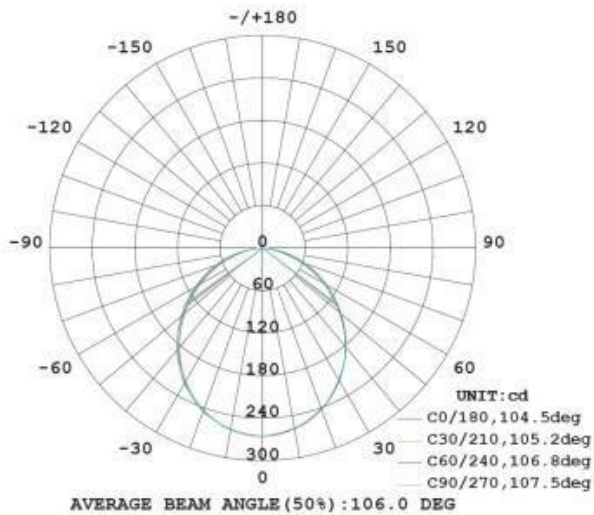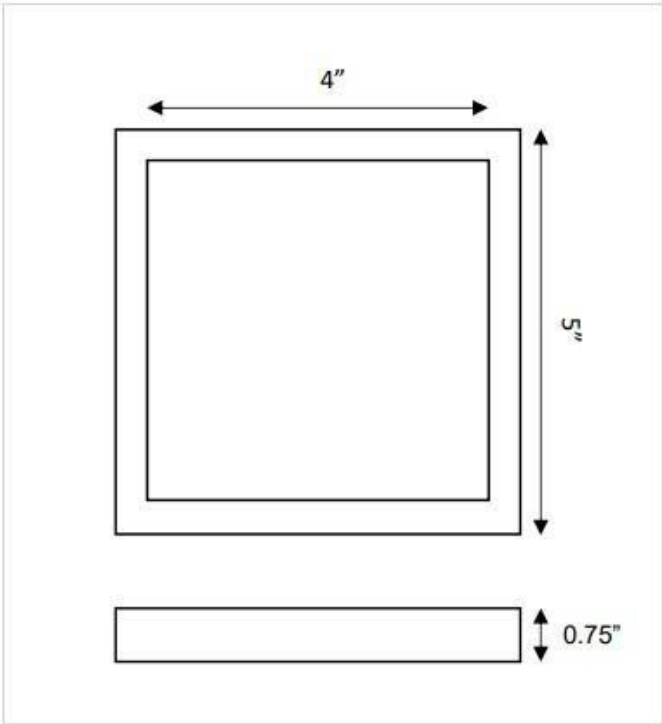

Ordering Example:
LI-LPF4-xx



ORDERING INFORMATION

Model	Watts	Lumen	Voltage	Color Temp.	CRI	Dimmable	TRIM
LI-LPFS4-xx LI-LPFS6-xx	10W 15W	800lm 1200lm	120AC	1 = 3000K 2 = 4000K 3 = 5000K	>80 >90	1 = Non Dimmable 2 = Dimmable	White, Brushed Nickel Bronze